


# Cembinder W Colloidal Silica Dispersions

To the Oil Field Industry



**AkzoNobel**

Tomorrow's Answers Today

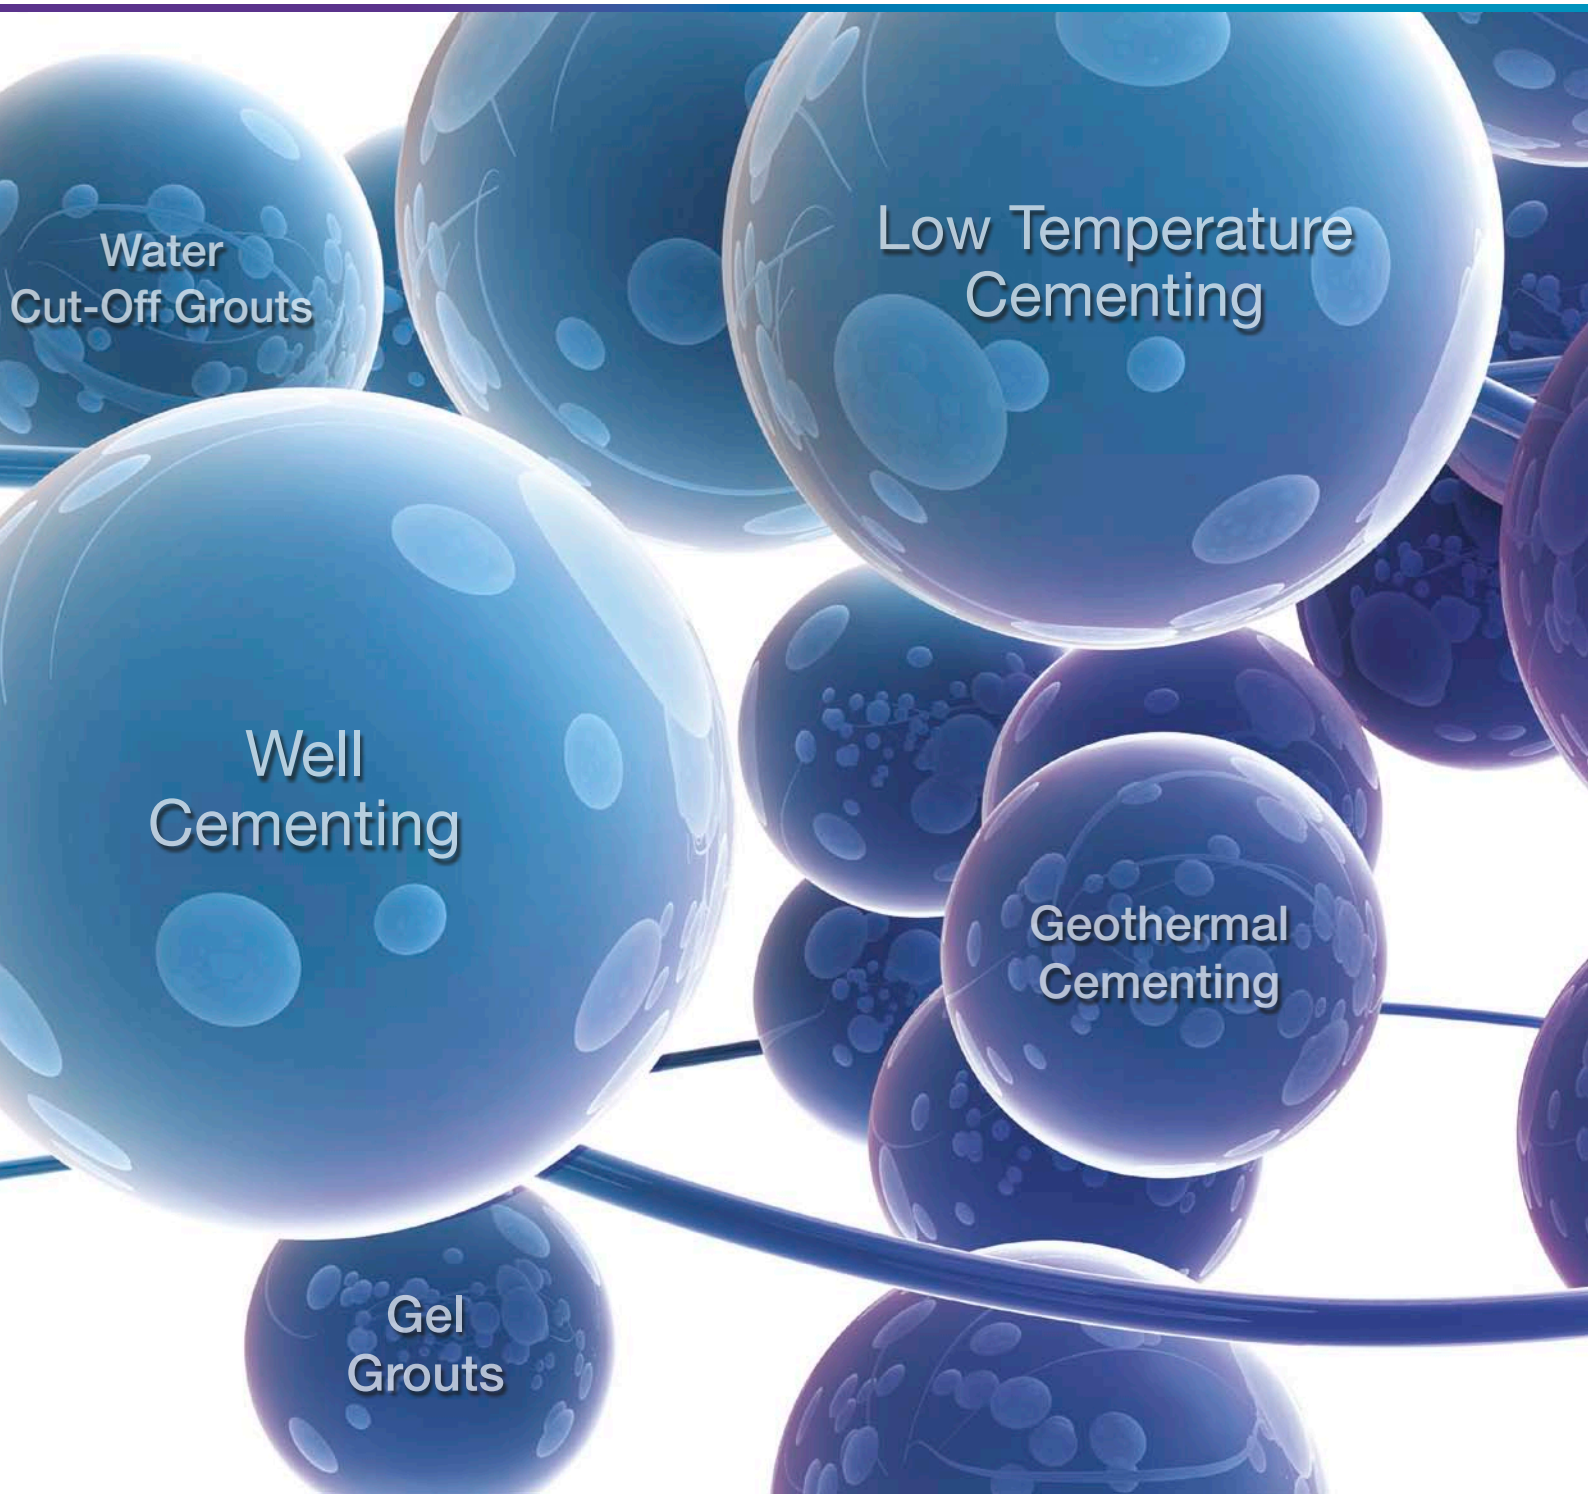

Water  
Cut-Off Grouts

Low Temperature  
Cementing

Well  
Cementing

Geothermal  
Cementing

Gel  
Grouts

# CEMBINDER W Technology

## – For Demanding Well Cementing

### **Cembinder W Technology for Safe and Predictable Well Cementing**

Cembinder W is suitable for all drilling operations both on- and offshore, in deep and ultra deep waters and at low or high temperatures.

Cembinder W provides substantial enhancement of early compressive strength, thereby shortening the setting time of the cement slurry. Since wait of cement (WOC) time is reduced, drilling ahead can resume earlier. Cembinder W is available in several different grades. W50, W36 and W75 are our most reactive grades and are suitable for deep waters applications.

### **Stable Slurries and Zero Free Water**

When Cembinder W is mixed with cement, the slurry becomes extremely stable and free water is eliminated. Due to their low specific gravity and low dosages, Cembinder W50 and W36 works extremely well in lightweight water slurries.

### **Storage Stability and Easy Handling Generating Cost Efficiency**

Cembinder W will not settle during storage and is perfect for use in a liquid additive system, giving virtually no waste during operations. The extremely high specific surface area, 200–900 square meters per gram, makes Cembinder W more effective per weight unit than other silica based additives. The effectiveness per volume and weight unit saves bulk, transportation, handling and storage costs.

### **Cembinder W Technology for Demanding Geothermal Well Cementing**

At high temperatures (150 C to 400 C) involved regression chemistry processes rapidly create a fractured and porous cement body structure. Loss in compressive strength is the main measurable consequences. The acidic groundwater caused by large amounts of dissolved carbon dioxide is the main reason for carbonation degradation of the cement grout, which opens the way for corrosion of the steel casing. Carbonation of the free lime (calcium hydroxide) phases in Portland cement and with certain cement blends forming a low alkali porous zonal structure between the formation and steel casing.

The disintegration of the cement structure is accelerated by the micro cracking caused by temperature-related regression and the carbonation process. Cembinder W colloidal silica technology helps the formulator to create more durable cement grouts.

- converts the lime to more temperature stable phases
- converts the lime to acid and carbonation resistant calcium-silica-hydrates.

### **Cembinder W Technology for Water Cut-Off Cement Grouts**

Cembinder W product grades with very large surface area generate an extremely cohesive cement grout. The silica particles react with free lime, leading to stabilization control and a set acceleration. A cohesive cement grout can control the wash-out problem connected to underwater application. Recommended grades are: CembinderW50 and CembinderW75.

### **OPERATIONAL BENEFITS**

#### **Major Benefits of Cembinder W:**

- Zero free water
- Early strength enhancement at low temperatures
- Low specific gravity excellent in light-weight slurries
- Improved gas migration control
- Uniform downhole results
- Improved bonding
- Stable low viscosity slurries
- Use in a liquid additive system
- Low required dosage reduces inventory at rig site

#### **Product Characteristics:**

- High product consistency
- Can be stored on the rig, over long periods of time, ready for use whenever needed
- Environmentally safe. Non-toxic, non-hazardous



# CEMBINDER W Technology

## – For Gel Barriers

### Water Barriers of Silica Gel

Cembinder W colloidal silica technology can permeate very narrow fractures. The active compound is an inorganic, high purity, water-based colloidal silica. Together with Cembinder W, a gel activator must be added; preferably, an inorganic water soluble salt. The gel-time is determined by the mixing ratio of the colloidal silica and the gel activator. By changing the mixing ratio, the gel-time can be adjusted from a few minutes up to several hours.

Before using, the user should determine the suitability of the product for its intended use. The user assumes the risk and liability in connection therewith. Since Cembinder W is incompressible, high pressure during injection is possible but not needed. It can also be adjusted by having longer open time, before gelling takes place. The gel-time is strongly dependent on temperature, silica concentration and mixing ratio.

### Key Benefit Summary

- Permeation of very narrow cracks (0.015 mm) or porous formations and sand structures
- A waterbased Newtonian liquid, with very low viscosity
- Stable in underground environments
- Accurately adjustable set time
- Hydraulic conductivity lower than  $10^{-8}$  cm/s can be reached
- User and environmentally friendly

### Cembinder W Product Line to the Oil Field Industry

| Grades        | Surface area m <sup>2</sup> /g | Average size nm (nanometer) | Concentration % silica by weight |
|---------------|--------------------------------|-----------------------------|----------------------------------|
| Cembinder W75 | 750                            | 3                           | 15                               |
| Cembinder W50 | 500                            | 5                           | 15                               |
| Cembinder W36 | 360                            | 7                           | 30                               |
| Cembinder W30 | 300                            | 9                           | 30                               |
| Cembinder W8  | 80                             | 35                          | 50                               |

### Further Information

For more detailed product information, please refer to the separate data sheet. For samples, technical service and further information, please contact your nearest office, visit our website at [www.colloidal.silica.com](http://www.colloidal.silica.com), or send an e-mail to [colloidalsilica@akzonobel.com](mailto:colloidalsilica@akzonobel.com)

### Head Office

Eka Chemicals AB  
Industrial Specialities  
SE-445 80 Bohus  
Sweden  
Phone: +46 (0)31 587000  
Fax: +46 (0)31 587859

### Europe

AkzoNobel Chemicals GmbH  
Industrial Specialities  
Kreuzauer Str. 46  
DE-52355 Düren, Germany  
Phone: +49 (0)2421 595494  
Fax: +49 (0)2421 595635

### North America

Eka Chemicals Inc  
1775 West Oak Commons Court  
Marietta, Georgia 30062  
USA  
Phone: +1 770 578-0858  
Fax: +1 770 321-5885

### Asia

AkzoNobel Asia Pte. Ltd  
Taiwan Branch 6F, B1, No 51  
Sec 2., Gonyi Road  
Taichung, 408, Taiwan, ROC  
Phone: +886 4 2327 0520  
Fax: +886 4 2327 0580



Cembinder™ is a registered trademark in several countries and our special colloidal silica water dispersions are produced and distributed worldwide. Industrial Specialities is a part of AkzoNobel and operates within the Eka Chemicals business unit. Information herein is accurate to the best of our knowledge. Suggestions are made without warranty or guarantee of results.

Before using, the user should determine the suitability of the product for his intended use and the user assumes the risk and liability in connection therewith. We do not suggest violation of any existing patents or give permission to practice any patented invention without a license.

AkzoNobel is the largest global paints and coatings company and a major producer of speciality chemicals. We supply industries and consumers worldwide with innovative products and are passionate about developing sustainable answers for our customers. Our portfolio includes well known brands such as Dulux, Sikkens, International and Eka. Headquartered in Amsterdam, the Netherlands, we are a Global Fortune 500 company and are consistently ranked as one of the leaders on the Dow Jones Sustainability Indexes. With operations in more than 80 countries, our 55,000 people around the world are committed to excellence and delivering Tomorrow's Answers Today™.