



DEZn SSG

Product description

Diethylzinc, Select Semiconductor Grade

Molecular formula : $(C_2H_5)_2Zn$
 Molecular weight : 123.5
 CAS No. : 557-20-0
 EINECS/ELINCS No. : 209-161-3
 TSCA status : listed on inventory

DEZn SSG is a Zn precursor for the deposition of III/V compound semiconductors. Compound semiconductors are used in applications such as light emitting diode, laser diode, high performance transistor and photovoltaic cells.

Specifications

For detailed specification please contact your AkzoNobel representative.

Characteristics

Appearance : colorless liquid
 Density, 30°C : 1.198 g/ml
 Melting point : -30°C
 Viscosity, 21°C : 0.7 mPa.s
 Boiling point : 117.6°C
 Stability to air : ignites upon exposure
 Stability to water : reacts violently, may ignite upon contact
 Solubility : soluble in aromatic and saturated aliphatic and cycloaliphatic hydrocarbons

Thermochemical properties


Specific heat, 57°C : 1.502 J/g.°C (0.359 cal/g.°C)
 Heat of vaporization ΔH_v , at 118°C : 326 J/g (78 cal/g)
 Heat of hydrolysis, 25°C : 2117 J/g (506 cal/g)
 Heat of formation ΔH_f° , 25°C, 1 bar : 17 kJ/mole (4 kcal/mole)
 Heat of combustion ΔH_c° , 25°C : -3364 kJ/mole (-804 kcal/mole)

Vapor pressure

at 10°C (283.15 K) : 6.79 torr
 at 20°C (293.15 K) : 12.2 torr

Gas constants: $\log P(\text{torr})=B-A/T(K)$

A : 2109
 B : 8.28

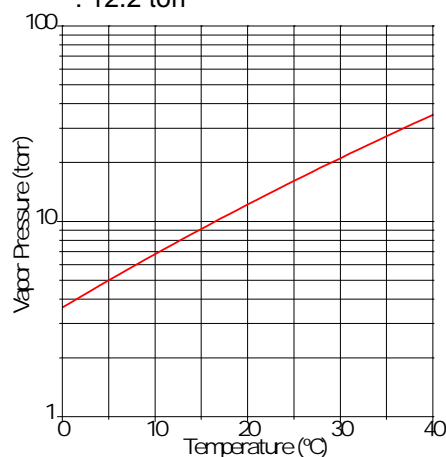

Storage

DEZn SSG is stable when stored under a dry, inert atmosphere and away from heat. CAUTION: DEZn SSG may undergo violent exothermic decomposition with flammable gas evolution if stored at temperatures above 70°C (158°F) (see section on Safety and handling).

Packaging and transport

Containers are fabricated from stainless steel with an electropolished internal finish and are equipped with dip tube for top discharge and diaphragm valves. The diaphragm valves are equipped with metal gasket face seal connections such as Swagelok® VCR®.

For more information please refer to our Cylinder Offerings leaflet, available at www.akzonobel.com/hpmpo. Both packaging and transport meet the international regulations.

DEZn SSG is classified as Organometallic substance, liquid, pyrophoric, water-reactive; Class 4.2; UN 3394; PG I.

Safety and handling

DEZ ignites upon exposure to air and reacts violently with water. Hydrocarbon solutions of DEZ may also ignite upon exposure to air. DEZ and its solutions must be handled under a dry, inert atmosphere, e.g. nitrogen or argon.

Neat DEZ may undergo exothermic decomposition with evolution of flammable gas if stored above 70°C. The decomposition may become self-accelerating and UNCONTROLLABLE and may result in a violent runaway reaction if heated above 120°C.

Water must be scrupulously removed from process equipment prior to putting it into metal alkyls service. Failure to do so may result in an explosion. Products of complete combustion of DEZn SSG are zinc oxide, carbon oxide and water. DEZn SSG causes severe burns to the skin and eyes. It is imperative that proper personal protective equipment be worn when handling DEZn SSG.

Please refer to the Material Safety Data Sheet (MSDS) for further information on the safe storage, use and handling of DEZn SSG. This information should be thoroughly reviewed prior to acceptance of this product.

The MSDS is available at www.akzonobel.com/hpmpo.

Swagelok and VCR are registered trademarks of Swagelok Company.

All information concerning this product and/or suggestions for handling and use contained herein are offered in good faith and are believed to be reliable. AkzoNobel Functional Chemicals, however, makes no warranty as to accuracy and/or sufficiency of such information and/or suggestions, as to the product's merchantability or fitness for any particular purpose, or that any suggested use will not infringe any patent. Nothing contained herein shall be construed as granting or extending any license under any patent. Buyer must determine for himself, by preliminary tests or otherwise, the suitability of this product for his purposes. The information contained herein supersedes all previously issued bulletins on the subject matter covered. The user may forward, distribute, and/or photocopy this document only if unaltered and complete, including all of its headers and footers, and should refrain from any unauthorized use. You may not copy this document to a website.

AkzoNobel Functional Chemicals
Amersfoort, The Netherlands
T +31 33 467 6767
F +31 33 467 6151

E metalorganicsEU@akzonobel.com

AkzoNobel Functional Chemicals
Chicago, U.S.A.
T +1 312 544 7000
1 800 828 7929 (Toll free US only)
F +1 312 544 7188
E metalorganicsNA@akzonobel.com

www.akzonobel.com/hpmpo

Akzo Nobel (Asia) Co., Ltd.
Shanghai, PR China
T +86 21 2216 3600
F +86 21 3360 7739

E metalorganicsAP@akzonobel.com