



## TMAI SSG

### Product description

Trimethylaluminum, select semiconductor grade

Molecular formula	: (CH <sub>3</sub> ) <sub>3</sub> Al
Molecular weight	: 72.1
CAS No.	: 75-24-1
EINECS/ELINCS No.	: 200-853-0
TSCA status	: listed on inventory

TMAI SSG is used as a high quality Al precursor for the deposition of compound semiconductors which are used in applications such as light emitting diodes, laser diodes, high performance transistors and highly efficient solar cells. TMAI SSG is also used in CVD processes in the Si-semiconductor industry.

### Specifications

For detailed specification please contact your AkzoNobel representative.

### Characteristics

Appearance	: clear, colorless liquid
Density, 30°C	: 0.743 g/ml
Melting point	: 15°C
Viscosity, 30°C	: 0.9 mPa.s
Boiling point, 760 torr	: 127°C
Stability to air	: ignites upon exposure
Stability to water	: reacts violently, may ignite upon contact
Solubility	: soluble in aromatic and saturated aliphatic and cycloaliphatic hydrocarbons

### Thermochemical properties


Specific heat, 57°C	: 2.213 J/g.°C (0.529 cal/g.°C)
Heat of vaporization $\Delta H_v$ at 127°C, 1 bar	: 247 J/g (59 cal/g)
Heat of formation $\Delta H_f^\circ$ , 25°C, 1 bar	: -151 kJ/mole (-36 kcal/mole)
Heat of combustion $\Delta H_c^\circ$ , 25°C	: -3180 kJ/mole (-760 kcal/mole)

### Vapor pressure

at 10°C (283.15 K)	: 4.87 torr
at 15°C (288.15 K)	: 6.57 torr

Gas constants:  $P(\text{torr})=B-A/T(K)$

A	: 2134
B	: 8.224

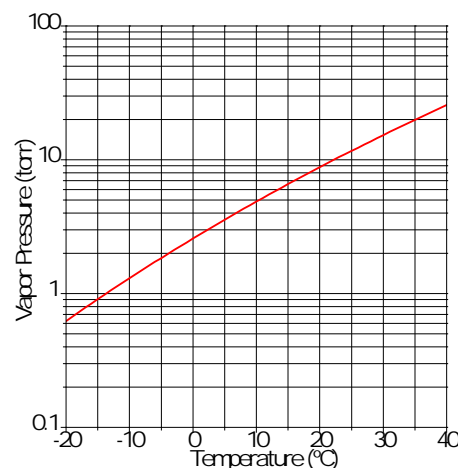

## Storage

TMAI SSG is stable when stored under a dry, inert atmosphere and away from heat. CAUTION: TMAI SSG may undergo exothermic decomposition with gas evolution at elevated temperatures (see section on Safety and handling).

## Packaging and transport

Containers are fabricated from stainless steel with an electropolished internal finish and are equipped with dip tube for top discharge and diaphragm valves. The diaphragm valves are equipped with metal gasket face seal connections such as Swagelok® VCR®.

For more information please refer to our Cylinder Offerings leaflet, available at [www.akzonobel.com/hpmo](http://www.akzonobel.com/hpmo). Both packaging and transport meet the international regulations.

TMAI SSG is classified as Organometallic substance, liquid, pyrophoric, water-reactive; Class 4.2; UN 3394; PG I.

## Safety and handling

TMAI SSG ignites upon exposure to air and reacts violently with water. Water must be scrupulously removed from process equipment prior to putting it into metal alkyls service. Failure to do so may result in an explosion. If heated above 120°C (248°F), TMAI SSG will undergo exothermic decomposition with evolution of flammable gas. Products of complete combustion of TMAI are aluminum oxide, carbon dioxide and water. TMAI SSG causes severe burns to the skin and eyes. It is imperative that proper personal protective equipment be worn when handling TMAI SSG.

Please refer to the Material Safety Data Sheet (MSDS) for further information on the safe storage, use and handling of TMAI SSG. This information should be thoroughly reviewed prior to acceptance of this product.

The MSDS is available at [www.akzonobel.com/hpmo](http://www.akzonobel.com/hpmo).

Swagelok and VCR are registered trademarks of Swagelok Company.

All information concerning this product and/or suggestions for handling and use contained herein are offered in good faith and are believed to be reliable. AkzoNobel Functional Chemicals, however, makes no warranty as to accuracy and/or sufficiency of such information and/or suggestions, as to the product's merchantability or fitness for any particular purpose, or that any suggested use will not infringe any patent. Nothing contained herein shall be construed as granting or extending any license under any patent. Buyer must determine for himself, by preliminary tests or otherwise, the suitability of this product for his purposes. The information contained herein supersedes all previously issued bulletins on the subject matter covered. The user may forward, distribute, and/or photocopy this document only if unaltered and complete, including all of its headers and footers, and should refrain from any unauthorized use. You may not copy this document to a website.

AkzoNobel Functional Chemicals  
Amersfoort, The Netherlands  
T +31 33 467 6767  
F +31 33 467 6151

E [metalorganicsEU@akzonobel.com](mailto:metalorganicsEU@akzonobel.com)

AkzoNobel Functional Chemicals  
Chicago, U.S.A.  
T +1 312 544 7000  
1 800 828 7929 (Toll free US only)  
F +1 312 544 7188  
E [metalorganicsNA@akzonobel.com](mailto:metalorganicsNA@akzonobel.com)

Akzo Nobel (Asia) Co., Ltd.  
Shanghai, PR China  
T +86 21 2216 3600  
F +86 21 3360 7739

E [metalorganicsAP@akzonobel.com](mailto:metalorganicsAP@akzonobel.com)

[www.akzonobel.com/hpmo](http://www.akzonobel.com/hpmo)